
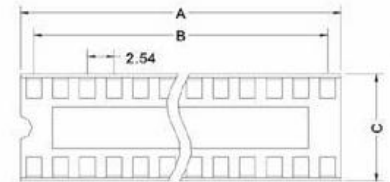




Панельки под микросхемы DIP шаг 2,54мм.

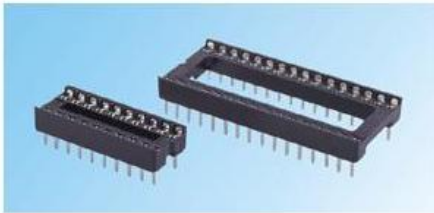

Specifications:




Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	Dimension				Position	Dimension			
	A	B	C	D		A	B	C	D
6	7.52	7.62	10.16	7.62	24	30.48	27.94	17.78	15.24
8	10.16	7.62	10.16	7.62	28	35.56	33.02	10.16	7.62
14	17.82	15.24	10.16	7.62	28	35.56	33.02	17.78	15.24
16	20.32	17.78	10.16	7.62	32	40.54	38.10	17.68	15.24
18	22.86	20.32	10.16	7.62	40	50.80	48.26	17.78	15.24
20	25.40	22.86	10.16	7.62	42	53.21	50.80	17.68	15.24
24	30.48	27.94	10.16	7.62					

Панельки под микросхемы DIP цанговые шаг 2,54мм

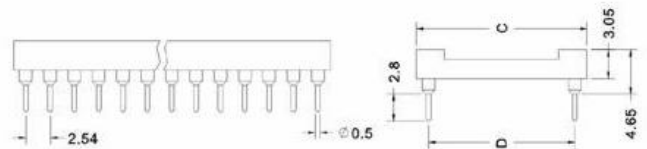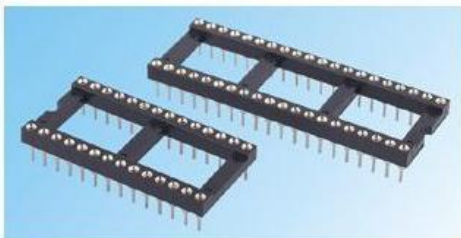

Specifications:


Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	Dimension				Position	Dimension			
	A	B	C	D		A	B	C	D
6	7.52	7.62	10.16	7.62	24	30.48	27.94	10.16	7.62
8	10.16	7.62	10.16	7.62	24	30.48	27.94	17.78	15.24
14	17.82	15.24	10.16	7.62	28	35.56	33.02	10.16	7.62
16	20.32	17.78	10.16	7.62	28	35.56	33.02	17.78	15.24
18	22.86	20.32	10.16	7.62	40	50.80	48.26	17.78	15.24
20	25.40	22.86	10.16	7.62					

Панельки под микросхемы PLCC

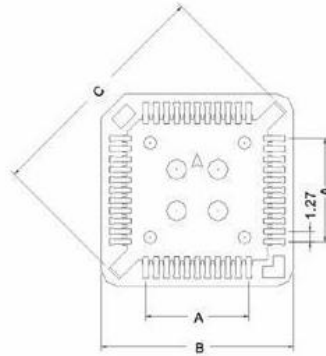


Position	A	B	C	D
PLCC28	7.62	18.10	22.20	12.70
PLCC32	10.16	21.30	25.70	15.24
PLCC44	12.70	23.50	29.80	17.78
PLCC52	15.24	26.00	32.64	20.32
PLCC68	20.32	30.20	40.10	25.40
PLCC84	25.40	35.20	46.90	30.48

Specifications:




Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PPS &40% Glass Fiber(UL 94V-0)
 PBT &30% Glass Fiber(UL 94V-0)



Панельки под микросхемы PLCC (SMD тип)



Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PPS & 40% Glass Fiber (UL 94V-0)
 PBT & 30% Glass Fiber (UL 94V-0)

Position	A	B	C	D
PLCC28N	7.62	18.10	22.20	12.70
PLCC32N	10.16	21.30	25.70	15.24
PLCC44N	12.70	23.50	29.80	17.78
PLCC52N	15.24	26.00	32.64	20.32
PLCC68N	20.32	30.20	40.10	25.40
PLCC84N	25.40	35.20	46.90	30.48