



Кабель телефонный плоский

Количество жил: 4,6,8

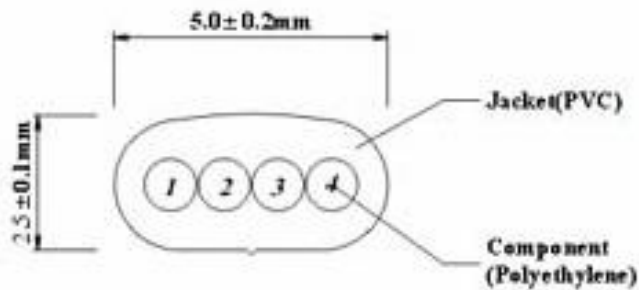

UL Style CSA Type NEC Type		Conductor Composition No./mm	No. of Cores	Insulation		Jacket	
				Thickness mm	Diameter mm	Thickness mm	Diameter mm
	TC-28B2C	28 AWG (19/0.080)	2	0.28	0.95	0.91	2.5x4.0
	TC-28B4C		4	0.28	0.95	0.68	2.5x5.0
	TC-28B6C		6	0.28	0.95	0.71	2.5x7.0
	TC-28B8C		8	0.28	0.95	0.73	2.5x9.0
	TC-26B2C	26 AWG (12/0.120)	2	0.25	0.95	0.87	2.5x4.0
	TC-26B4C		4	0.25	0.95	0.62	2.5x5.0
	TC-26B6C		6	0.25	0.95	0.62	2.5x7.0
	TC-26B8C		8	0.25	0.95	0.62	2.5x9.0
	TC-32S2C	32 AWG (4/T250 TINSEL WIRE)	2	0.25	0.95	0.87	2.5x4.0
	TC-32S4C		4	0.25	0.95	0.62	2.5x5.0
	TC-32S6C		6	0.25	0.95	0.62	2.5x7.0

UL20251 CSA AWM NEC CM 	TC-32S8C		8	0.25	0.95	0.62	2.5x9.0
	TC-28B2K	28 AWG (7/0.127)	2	0.28	0.95	0.88	2.4x4.0
	TC-28B4K		4	0.28	0.95	0.66	2.4x5.0
	TC-28B6K		6	0.28	0.95	0.69	2.4x7.0
	TC-28B8K		8	0.28	0.95	0.71	2.4x9.0
	TC-26B2K	26 AWG (7/0.160)	2	0.25	0.95	0.85	2.4x4.0
	TC-26B4K		4	0.25	0.95	0.60	2.4x5.0
	TC-26B6K		6	0.25	0.95	0.60	2.4x7.0
	TC-26B8K		8	0.25	0.95	0.60	2.4x9.0
	TC-24B2K	24 AWG (11/0.160)	2	0.25	0.95	0.85	2.4x4.0
	TC-24B4K		4	0.25	0.95	0.60	2.4x5.0
	TC-24B6K		6	0.25	0.95	0.60	2.4x7.0
	TC-24B8K		8	0.25	0.95	0.60	2.5x9.0

Кабель компьютерный коммуникационный экранированный

Количество проводников: 4,5,6,9,15,18,25



Характеристики:

Допустимый диапазон: 80С 300V


Изоляция: PVC

Толщина проводника: 28 AWG

Бухта: 100м

Кабель плоский (шлейф)

Шаг проводников: 1,27мм

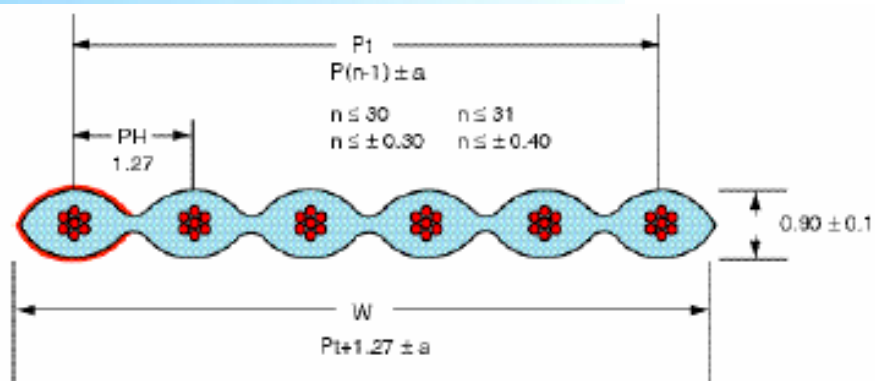

Code No.	Number of Cores	Size of conductor		Thickness (mm±0.05)	Width (mm)	Allowable error(mm)
		(AWG)	Composition (solid/mm)			
FC-09	9	28	7/0.127	0.9	11.43	± 0.30
FC-10	10	28	7/0.127	0.9	12.70	± 0.30
FC-14	14	28	7/0.127	0.9	17.78	± 0.30
FC-15	15	28	7/0.127	0.9	19.05	± 0.30
FC-16	16	28	7/0.127	0.9	20.32	± 0.30
FC-20	20	28	7/0.127	0.9	25.40	± 0.30
FC-25	25	28	7/0.127	0.9	31.75	± 0.30
FC-26	26	28	7/0.127	0.9	33.02	± 0.30
FC-30	30	28	7/0.127	0.9	38.10	± 0.30
FC-34	34	28	7/0.127	0.9	43.18	± 0.40
FC-36	36	28	7/0.127	0.9	45.72	± 0.40
FC-40	40	28	7/0.127	0.9	50.80	± 0.40
FC-50	50	28	7/0.127	0.9	63.50	± 0.40
FC-60	60	28	7/0.127	0.9	76.20	± 0.40
FC-64	64	28	7/0.127	0.9	81.28	± 0.40

Характеристики:

Spark test : 2500V
Dielectric strength test : Minimum 2 KV in 1 minute
Conductor resistance : Maximum 237 Ω /km
Insulation resistance : Minimum 100M Ω -km
Capacity : 44pF/m (G-S-G)
Inductance : 1.45 μ H/m
Characteristic Impedance : 105 Ω (G-S-G)
Propagation delay time : 4.2 ns/m

Кабель мультикоаксиальный (VGA)



Характеристики:

Диапазон: 80С 300V
Изоляция: PVC
Бухта: 150м
Проводники: 3+4; 3+6
 3+7: 3+8